


MMTC 2000

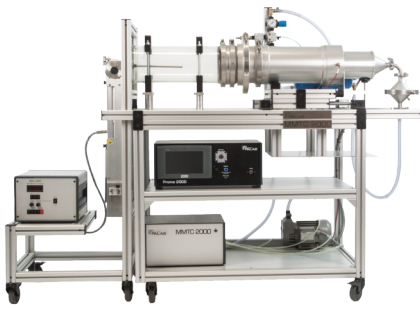

With the MMTC series, Palas® offers a reliable and cost-effective test system for quality control and the development of cleanable filter media. The filter test rigs in the MMTC series offer high test result reproducibility. The compact and robust layout of the MMTC 2000 and its functional and straightforward operation have impressed our customers in the industry. With the aid of the MMTC series, standard filter media tests can be performed in accordance with VDI 3926 (including aging). Different media are optimized for various applications in terms of their structure and surface treatment. This minimizes emissions and increases the service life of the medium. In contrast to the VDI guidelines, with the aid of the MMTC series, it is possible to perform reliable filter media tests with different powders used in practice. Palas® MMTC filter test rigs are already used internationally ...

BENEFITS

- Internationally comparable measurement results thanks to the widespread use of the MMTC 2000 measurement system
- High reproducibility of the testing method
- Different dusts from real applications can be used
- Quick and easy adjustment of the raw gas concentration
- Simulation of the so-called garland effect
- Suitable for in-situ measurements
- Online measurements of the particle size and particle concentration with the light scattering spectrometer *welas®* digital
- MMTC 2000 EHF: This test rig can be heated to 250°C; the relative humidity can be set to levels up to 80% (at a temperature of 90°C).
- Lightweight, small, and mobile design
- Easy handling, easy cleaning
- Quick set-up time when changing the filter or test dust
- Validation of the clear function of individual components and the overall system during pre-delivery acceptance testing
- Reliable operation
- Short set-up times, extremely low-maintenance
- The unit will reduce your operating costs

APPLICATIONS

- Standardized test in accordance with VDI 3926
- Individual tests under close-to-real conditions as defined by the different process conditions, e.g., in the cement industry, wood-processing industry, pharmaceutical industry, chemical industry, nuclear power plants, and many other areas...

MODEL VARIATIONS



MMTC 2000 E

Stainless steel version for temperatures up to 70°C

<https://www.palas.de/product/mmtc2000e>



MMTC 2000 EH

Stainless steel version with heating and insulation for temperatures up to 250°C

<https://www.palas.de/product/mmtc2000eh>

DATASHEET

| | | | |
|-----------------------------------|---|---------------------------------|---|
| Aerosols | Dusts (e. g. SAE dusts) | Test area of the medium | 177 cm ² |
| Volume flow | 1 – 5.5 m ³ /h (others on request, suction mode) | Power supply | 120 – 230 V, 2A (single phase connection) |
| Differential pressure measurement | 0 – 5,000 Pa | Inflow velocity | 3 – 8.8 cm/s (others on request) |
| Compressed air supply | 6 – 8 bar | Powder Dispenser | RBG 2000 für nicht kohäsive Pulver und Stäube, z. B. Pural NF, Pural SB, ISO A2 fine, ISO A4 coarse, verschiedene Arten von TiO ₂ und anderen Pulvern, Massenstrom: ca. 0,2 – 90 g/m ³ (abhängig von Pulvergröße und -dichte) |
| Valve opening times | 50 – 500 ms | Pressure for pulse jet cleaning | Adjustable up to 6 bar _g |
| Dimensions | Approx. 1,200 • 630 • 1,700 mm (H • W • D) | | |